

Adjustable height up to 5mm

Glass panels can be moved by the grip mechanism



Safety stopper for panel end point adjustment


Special sloped rail design for efficient drainage

Anti-slip rubber ensures safety passage and also offers ease of rail surface cleaning




Bottom wheel carriages with double rollers ensure optimum and smooth running even with wide glass panels


Anodised bottom rail for easy and smooth movement

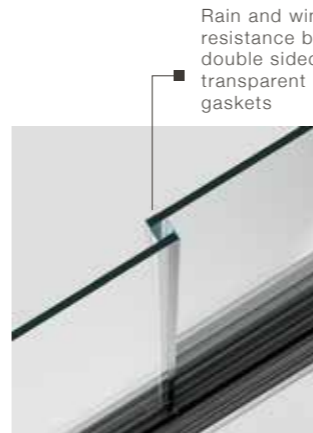

Rain and wind resistance by double sided transparent gaskets

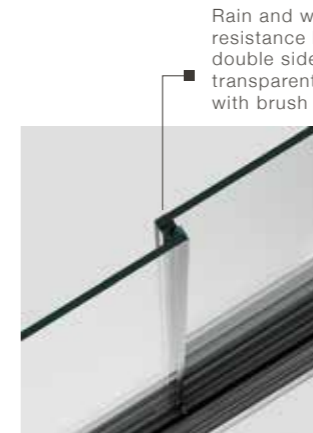

Rain and wind resistance by double sided transparent gaskets with brush

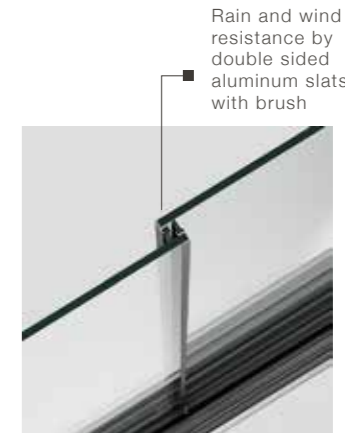


Rain and wind resistance by double sided aluminum slats with brush



Brush and rubber cord for high frame insulation

Functional and minimal handle and locking kit

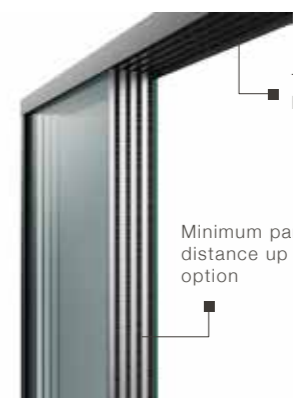

Top rail brush cord for high insulation

Minimum parking distance up to 5 panels option